

INTERPLAN^{LLC}

Goddard School Darien
01-31-12
Page 1 of 1

Addendum No. 2 (2 pages total)

Date: 01-27-12

Project: Goddard School – Darien, Illinois
Project number: 2011.0321

Architect: Interplan LLC: 1 S 280 Summit Ave. Oakbrook Terrace, IL 60181
Tel) 630-932-2336, Fax) 630-932-2339

This Addendum shall form as a part of and modifies the bidding requirements and contract documents prepared by Interplan LLC. for the above referenced project dated 01-12-12. Receipt of this Addendum shall be acknowledged on the Bid Form. Failure to do so may subject the Bidder to disqualification.

1. **Project** –The Project is not required to be 100% union. The Owner is requiring the electrical and plumbing trades to be union.
2. **Structural Framing** – The notes on the structural drawings take precedent over Specification Section 06 10 00 and 06 17 53.
3. **West Retaining Wall** – The difference in grade from the west side of the retaining wall to the east side is 1'-0".
4. **Vinyl Fencing** – The vinyl fencing should be Certainteed Bufftech fencing or equal with a lifetime warranty, see attached cut sheet. The vinyl fencing posts should be set in concrete foundations as per manufacturer's installation instructions.


The frost walls for the doors on the north side of the building should extend out from the building 4'-6" in lieu of 5'-0" to allow room for the installation of the fence post. The fence posts can be installed prior to the sidewalk pour or core drilled after the sidewalk pour.

The fence on the west side of the building should be installed on the high side (east) of the retaining wall.

End of ADDENDA

Picket Spacing 1 3/4"

6 feet high | 8 feet wide

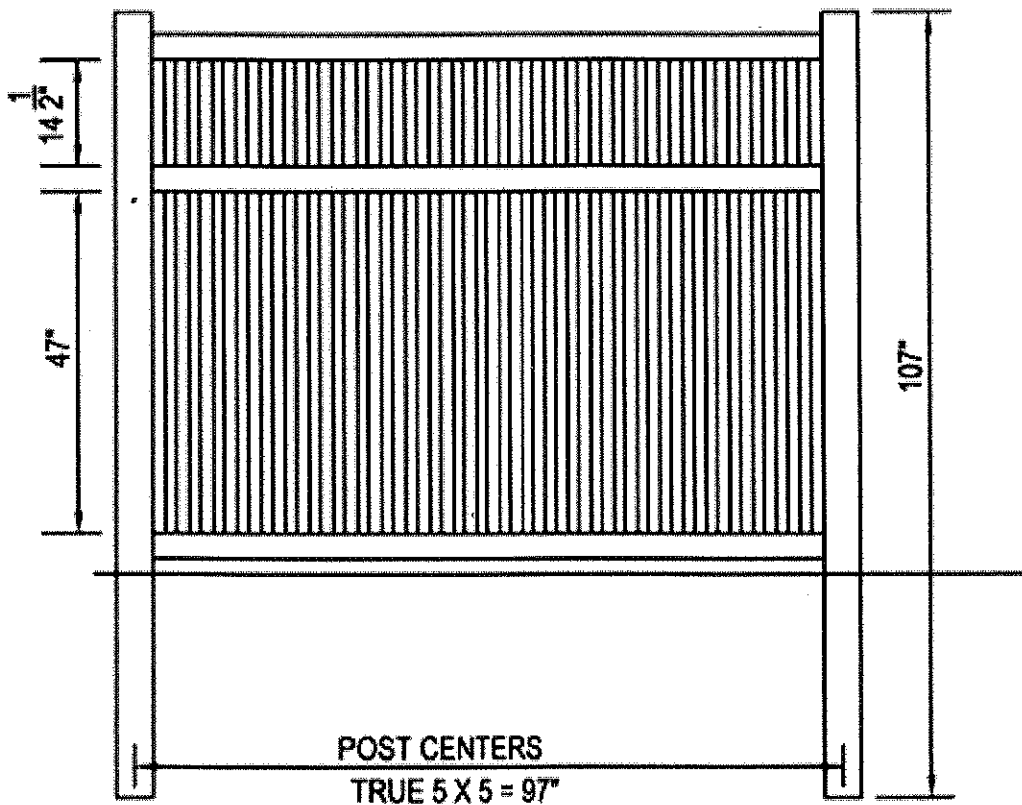

- Top & Mid Rail** 2" x 4" x 95 1/2"
- Bottom Rail** 2" x 4" x 95 1/2" includes steel channel
- Posts** 4" x 4" x 107" (4" x 4" x 84" for above ground installation)
- Pickets** 28 pieces of 7/8" x 1 1/2" x 71 5/8"
- Picket Spacing** 1 3/4"

We currently don't have pictures of gates for this fence style. However, below are sample pictures to give you a better idea c

<graphics/00000001/gates-clay-certagrain-gate-clearbox-lg.jpg>